

SHARP®

solar electricity

142 WATT

OnEnergy™
SYSTEM MODULE



ND-N2ECUF

RESIDENTIAL 142 WATT
MODULE FROM THE WORLD'S
TRUSTED SOURCE FOR SOLAR.

This high-quality residential solar module is designed and engineered for use with the Sharp OnEnergy solar system. Sharp's OnEnergy system replaces the bulky look of traditional solar roof mounts with a clean, elegant appearance that blends beautifully with rooflines. Using breakthrough technology, made possible by nearly 50 years of proprietary research and development, this module incorporates an advanced surface texturing process to increase light absorption and improve efficiency. Ideal for virtually all sizes of residential solar systems, this module offers improved aesthetics and durability under the most rigorous operating conditions.

ENGINEERING EXCELLENCE

Designed and engineered for use with Sharp's OnEnergy solar racking system, this module is the perfect combination of technology and design.

ADVANCED AESTHETICS

Black frame module, and associated racking with hidden hardware and tapered covers, delivers a clean, elegant appearance that blends beautifully with your home's roofline.

DURABLE

Tempered glass, EVA lamination and weatherproof backskin provide long-life and enhanced cell performance.

RELIABLE

25-year limited warranty on power output.

HIGH PERFORMANCE


This module uses an advanced surface texturing process to increase light absorption and improve efficiency.

[Designed for]

ONENERGY™
solar system by Sharp



Black frame and low profile racking complement roofline.



Laminated glass construction in a high torsion frame.

SHARP: THE NAME TO TRUST

When you choose Sharp, you get more than well-engineered products. You also get Sharp's proven reliability, outstanding customer service and the assurance of our 25-year limited warranty. A global leader in solar electricity, Sharp powers more homes and businesses than any other solar manufacturer worldwide.

BECOME POWERFUL

142 WATT

ND-N2ECUF

ELECTRICAL CHARACTERISTICS

Maximum Power (Pmax)*	142 W
Tolerance	+10%/-5%
Type of Cell	Polycrystalline silicon
Cell Configuration	42 in series
Open Circuit Voltage (Voc)	25.24 V
Maximum Power Voltage (Vpm)	19.92 V
Short Circuit Current (Isc)	7.84 A
Maximum Power Current (Ipm)	7.13 A
Module Efficiency (%)	12.31%
Maximum System (DC) Voltage	600 V
Series Fuse Rating	15 A
NOCT	47.5°C
Temperature Coefficient (Pmax)	-0.485%/°C
Temperature Coefficient (Voc)	-0.36%/°C
Temperature Coefficient (Isc)	0.053%/°C

*Measured at (STC) Standard Test Conditions: 25°C, 1 kW/m², AM 1.5

MECHANICAL CHARACTERISTICS

Dimensions (A x B x C below)	45.87" x 38.98" x 1.81"/1165 x 990 x 46 mm
Cable Length (H)	51.2"/1300 mm
Type of Output Terminal	Lead Wire with MC Connector
Weight	31.96 lbs / 14.5 kg
Max Load	50 psf (2400 Pascals)


QUALIFICATIONS

UL Listed	UL 1703	
Fire Rating	Class C	

WARRANTY

25-year limited warranty
Contact Sharp for complete warranty information


IV CURVES

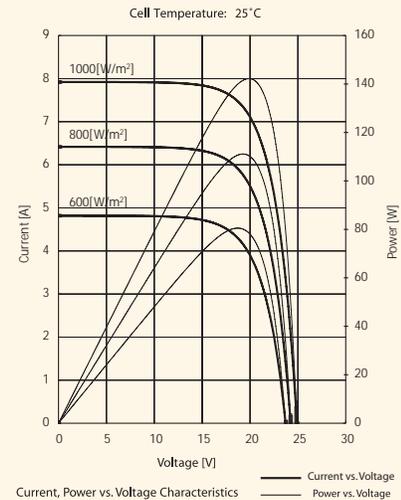

DIMENSIONS

SIDE VIEW

BACK VIEW

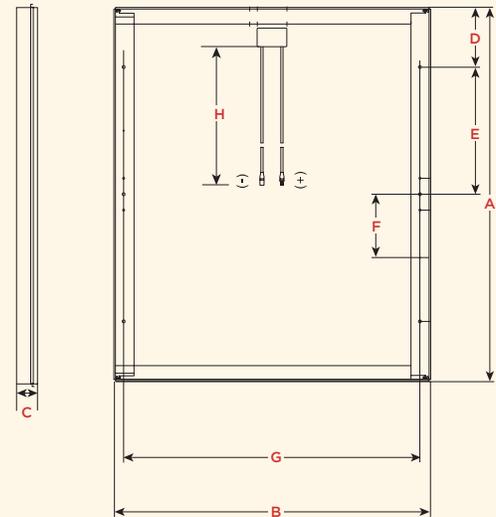

A	B	C	D	E
45.87"/1165 mm	38.98"/990 mm	1.81"/46 mm	7.2"/182.5 mm	15.75"/400 mm
F	G	H		
7.87"/200 mm	36.85"/936 mm	51.2"/1300 mm		

Contact Sharp for tolerance specifications

Design and specifications are subject to change without notice. Sharp is a registered trademark of Sharp Corporation. All other trademarks are property of their respective owners. OnEnergy and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. Sharp takes no responsibility for any defects that may occur in equipment using any Sharp devices. Contact Sharp to obtain the latest product manuals before using any Sharp device.

SHARP®

SHARP ELECTRONICS CORPORATION
5901 Bolsa Avenue, Huntington Beach, CA 92647
1-800-SOLAR-06 • Email: sharpsolar@sharpusa.com
www.sharpusa.com/solar